



RAELink3 Z1

Wireless Modem with Integrated
Global Positioning System



RAELink3 Z1 modem allows integration of many RAE Systems gas and radiation monitors, and select third-party devices into an AreaRAE wireless detection system. Monitors linked with a RAELink3 Z1 modem can communicate sensor data and GPS coordinates to a PC running RAE Systems safety monitoring software. Bluetooth connectivity simplifies use with handheld monitors, while a user-friendly display and interface simplify configuration and status checking of the RAELink3 Z1.

- View and track sensors and responders downrange
- Deploy quickly and easily
- Merge multiple detection technologies on one viewing platform
- Integrate two devices with one RAELink3 Z1 using Bluetooth and a cable

KEY FEATURES

- Integrated
 - GPS equipped for tracking and viewing of monitors on a local mapping area
 - Bluetooth or cable connection options to monitors
 - Long range radio to transmit sensor data up to 3 km
- Versatile
 - Easily configure in the field to interface with other AreaRAE systems
 - Programmable from Host modem, to Repeater, to Remote modem as needed
 - Configurable for a variety of monitors and detection technologies

- Easy to Use
 - Backlit display with intuitive interface
 - Radio strength indicator on LCD
- Durable
 - Weatherproof
 - Shock resistant
 - Up to 14 hours run time on single charge

APPLICATIONS

- Industrial Safety
- Emergency Response
- Decontamination
- Venue Protection
- Indoor Air Quality



Hazardous Material Response Team member using MultiRAE Plus and GammaRAE II R with RAELink3 Z1



ATEX

RAELink3 Z1




Wireless Modem with Integrated Global Positioning System

SPECIFICATIONS*

| | |
|-----------------------|--|
| Size | 4.73" L x 3.4" W x 1.85" H (12cm x 8.65cm x 4.7cm) without antenna |
| Weight | 17.3 oz (490 g) |
| Battery | Rechargeable, 7.4V/1650mAh, lithium-ion battery |
| Operating Hours | Up to 14 hours continuous operation |
| Operating Temperature | -4° to 131° F (-20° to +55° C) |
| Humidity | 0% to 95% relative humidity (non-condensing) |
| IP Rating | IP-65 |
| GPS Accuracy | Within 5 meters |
| Frequency | 869 MHz (license free ISM band) |
| Peak RF Power | +27 dBm ERP with 1.5 dBi antenna |
| Range | Up to 3 kilometers |
| Interface | RS-232 or Bluetooth |
| Keypad | Three operation and programming keys |
| Display | LCD, 128 X 64 |
| Safety Certification | ATEX II 2G EEx ib IIc T4 |

* Specifications are subject to change.

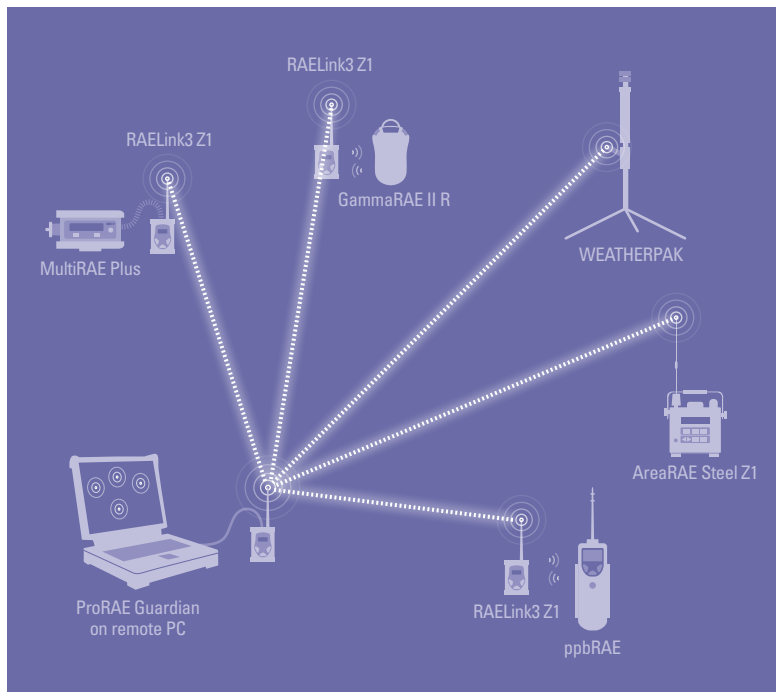

RAELINK3 Z1 COMMUNICATION KITS

RAELink3 Z1 kit enables communication between a variety of RAE Systems' most popular monitors and safety monitoring software like ProRAE Remote or ProRAE Guardian.

RAE Monitors

- GammaRAE II R
- MiniRAE 3000, ppbRAE 3000 and UltraRAE 3000
- MultiRAE Plus
- MiniRAE 2000
- ppbRAE Plus

RAELink3 Z1 Communication Kit Includes:

- RAELink3 Z1 modem equipped with GPS, Bluetooth, and 869MHz long range radio
- Whip antenna with TNC connection
- Antenna with 3.5 meter cable and magnetic mount—For use when in Host or Repeater mode
- Charging adapter and power cable
- Hard transport case
- Quick reference guide and resource CD
- RS-232 cable (for connection to devices not equipped with Bluetooth)

ORDERING INFORMATION

| RAELink3 Z1 Modem | Part Numbers |
|----------------------|--------------|
| (869 MHz, Bluetooth) | 029-0600-000 |

Contact RAE Systems for other frequency options

CORPORATE HEADQUARTERS

RAE Systems by Honeywell

3775 North First Street
San Jose, CA 95134 USA
raesales@raesystems.com

DS-1061-02

WORLDWIDE SALES OFFICES

USA/Canada 1.877.723.2878
Europe +45.86.52.51.55
Middle East +00971.4.440.5949
China +86.10.5885.8788-3000
Asia Pacific +852.2669.0828

www.raesystems.com



DETECTION | **S**AFETY | **P**ROTECTION

For Pricing or Further
Information Please Contact Us.



+441158390495



www.manonglobal.com



sales@manonglobal.com

**Leading UK Suppliers In
Gas Detection, Safety & Protection
Products
Brand New & Genuine OEM Parts
UK & Worldwide Deliveries Available**



Worldwide Delivery



1000+ Genuine Parts & Equipment